

**new**

## SCLR INDEXABLE BORING BARS & SETS

SCLR

- Utilize CCMT 80° diamond inserts.
- Negative 5° Lead angle for boring.
- Torx wrench included.
- CCMT insert included.

**Set Includes:**

- (4) Indexable Boring Bars.
- (2) Torx Screws.
- (2) Torx wrenches.
- (4) CCMT inserts

**Application:**

- Profiling bars for semi-finishing and finishing operations



5 PC SET  
Item 1001-0023

**\$197<sup>80</sup>**  
(F)

5/16, 3/8, 1/2, 5/8 & 3/4"

Dimension Style	Min. Dia. x OAL	Bore	Insert	Item#	Price (F)
SCLR4-2	5/16 x 4"	.437"	CCMT-21.5	1001-0025	35.22
SCLR6-2	3/8 x 6"	.500"	CCMT-21.5	1001-0026	39.54
SCLR8-3	1/2 x 7"	.625"	CCMT-32.5	1001-0027	43.44
SCLR10-3	5/8 x 8"	.812"	CCMT-32.5	1001-0028	51.78
SCLR12-3	3/4 x 10"	1.00"	CCMT-32.5	1001-0029	55.50
SCLR16-3	1 x 12"	1.25"	CCMT-32.5	1001-0030	68.15

3 PC SET  
Item 1001-0020

**\$93<sup>10</sup>**  
(F)

5/16, 3/8, & 1/2"

3 PC SET  
Item 1001-0021

**\$117<sup>80</sup>**  
(F)

1/2, 5/8 & 3/4"

4 PC SET  
Item 1001-0054

**\$162<sup>70</sup>**  
(F)

3/8, 1/2, 5/8 & 3/4"

**new**

## SCLR COOLANT-THRU INDEXABLE BORING BARS & SETS

SCLR

COOLANT THRU  
4 PC SET  
Item 1001-0699

**\$239<sup>00</sup>**  
(F)

5/16, 3/8, 1/2 & 5/8"

- Utilize CCMT 80° diamond inserts.
- Negative 5° Lead angle for boring.
- Torx wrench included.
- CCMT insert included.

**Set Includes:**

- (4) Indexable Boring Bars.
- (2) Torx Screws.
- (2) Torx wrenches.
- (14) CCMT inserts

**Application:**

- Profiling bars for semi-finishing and finishing operations
- The coolant hole allows the cutting edge to cool and removes chips.

Dimension Style	Min. Dia. x OAL	Bore	Insert	Item#	Price (F)
SCLR4-2	5/16 x 4"	.437"	CCMT-21.5	1001-0312	52.40
SCLR6-2	3/8 x 4-1/2"	.500"	CCMT-21.5	1001-0375	56.94
SCLR8-2	1/2 x 5"	.625"	CCMT-21.5	1001-0500	62.37
SCLR10-2	5/8 x 6"	.812"	CCMT-21.5	1001-0625	71.36




**new**

## STYLE S-SDJCR INDEXABLE BORING BARS - SCREW ON Negative 3-Degree Lead Angle

SDJCR

Boring Bar Style	Shank	Min. Bore	OAL	Use Insert	RH Item#	Price (F)
8-2	1/2"	.780"	8"	DCMT-21.52	1010-0500	33.85
10-2	5/8"	.840"	10"	DCMT-21.52	1010-0625	36.00
12-3	3/4"	1.125"	10"	DCMT-32.52	1010-0750	39.96
16-3	1"	1.500"	12"	DCMT-32.52	1010-1000	54.80

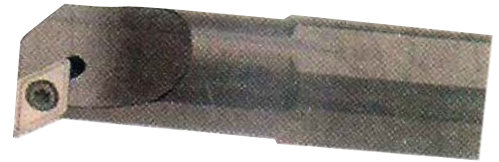

**new**

## STYLE SDUCR INDEXABLE BORING BARS - SCREW ON STYLE Negative 3-Degree Lead Angle for Boring and Profiling

SDUCR

Boring Bar Style	Shank	Min. Bore	OAL	Insert Style	Item#	Price (F)
6-2	0.375"	0.500"	6"	DCMT-21.51	1003-2375	33.00
8-2	0.500"	0.625"	6"	DCMT-21.51	1003-2500	35.00
10-2	0.625"	0.812"	8"	DCMT-21.51	1003-2625	38.75
12-3	0.750"	1.000"	10"	DCMT-32.52	1003-2750	42.50

